
45-40 공압 수평 압착 다이 | 단자 압착 금형

Model No. JW-AP15

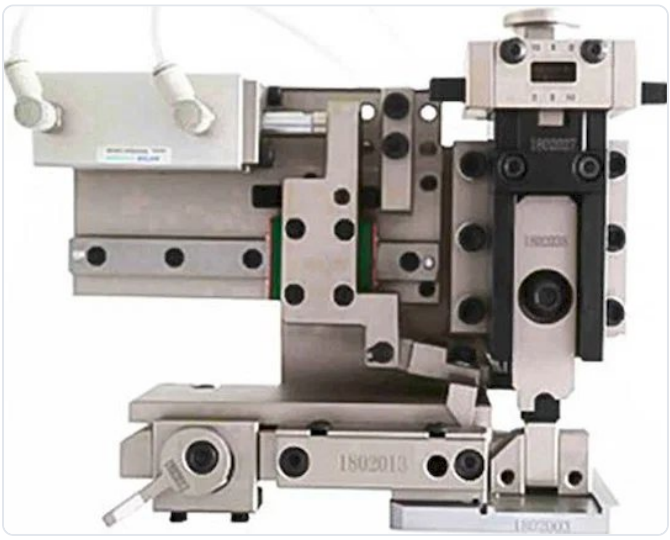

SPECIFICATIONS

모델 번호	45-40
유형	공압 수평 압착 다이
적용 분야	단자 압착, OTP 금형
금형 형태	U자형, 수평 및 수직 압착

45-40 공압 수평 다이, 단자 압착 금형, 단자 압착 다이, 단자 압착 애플리케이터, OTP U자형 금형, 단자 기계 어플리케이터, OTP 금형, OTP 단자 금형, 단자 어플리케이터 다이 OTP 금형 수평 및 수직 압착 금형, 단자 어플리케이터, 다이, OTP 금형, 수평 및 수직 압착 금형

OTP high precision horizontal mold



Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 30mm
Scope of application:
It is suitable for high-precision terminal and connection wire manufacturers with very high requirements for crimping. The ingredients are QPQ and heat-treated fine embroidery technology, which can make the product size more accurate, and it is common with JAM, Xinming and terminal machines.



4S-40 pneumatic horizontal die

Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various horizontal terminals

4E-40 pneumatic straight mold



Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various straight terminals